HARRISON
K 144
12-4-73

MISSISSIPPI
BOARD OF WATER COMMISSIONERS
416 North State Street
Jackson, Mississippi 39201

CODED

WATER WELL DRILLERS LOG

12-4-73 19__ R. J. Moore HARRISON
date well completed | firm name | county well located

LANDOWNER: Peyton Turner
Rt 3 Bayou Bonard Rd
Gulfport, Miss
(mailing address)

WELL LOCATION:
sec. 11 T 7 N (S) R. 12 E (W)
4 miles W of Lyndon
(distance) (direction) (nearest town)

WELL PURPOSE: 2"
(Home, irrigation, municipal, industrial)

WELL COMPLETION DATA:
(1) diameter (inches) 2"
(2) total depth (feet) 610'
(3) static water level (feet) 48' below/above top of ground.
(4) casing Pvc (material), 568' (depth)
__ (size) if telescope see back.
(5) screen 20' (length), 588' (depth to top)
2" (size), SS (material)
(6) pump 1 (HP) 10 (yield gpm)
E (type power)
(7) electric log __ (yes or no)
__ (organization running log)
(8) how well bottom plugged
Pvc Plug

DRILLERS REMARKS:

description of formations encountered	from	to
Top Soil	0	20
Top Sand	20	40
Blue Clay	40	200
Spring Sand	200	240
~~Blue Sand~~ Blue Clay	240	350
Spring Sand	350	380
Blue Clay	380	540
Gray Sand (Coarse)	540	590
Fine Gray Sand	590	610

CODED

If well telescopes please sketch and show depths.

GROUND LEVEL

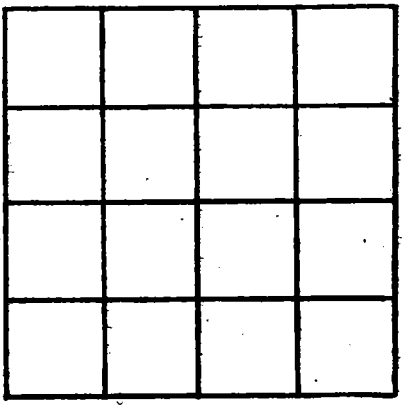

SECTION _____

Please indicate well location X.

ADDITIONAL INFORMATION

If more than one screen, show locations of each on sketch.