

UNITED STATES

DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
WATER RESOURCES DIVISION


44.00  
6.97  
37.03  
1.00  
36.03

WELL SCHEDULE


ELOG # 127

Date 7-4-1960 Field No. \_\_\_\_\_  
Record by T. N. Shows Office No. 2905  
Source of data DALLER + OBSE P132

1. Location: State MISS County JACKSON  
Map PASCAGOULA PROJECT  
1/4 ANDERSON 1/4 sec. T 8 NR 6 EW
2. Owner: U.S.G.S. #9 Address ANDERSON PL.  
Tenant \_\_\_\_\_ Address \_\_\_\_\_  
Driller: JACK GREEN Address CAUTIER, MS
3. Topography \_\_\_\_\_
4. Elevation 5 ft. ~~above~~ MSL topo. below
5. Type: Dug, drilled, driven, bored, jetted 2-4-1960
6. Depth: Rept. 357 ft. Meas. 357 ft.
7. Casing: Diam. 2 in., to 2 in., Type \_\_\_\_\_  
Depth \_\_\_\_\_ ft., Finish 10' screen 284-294
8. Chief Aquifer Graham Ferry From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Others \_\_\_\_\_
9. Water level 36.03 ft. rept 7-5-1960 above top below  
7 pipe which is 1.0 ft. above below surface
10. Pump: Type Jet Capacity \_\_\_\_\_ G. M.  
Power: Kind \_\_\_\_\_ Horsepower \_\_\_\_\_
11. Yield: Flow \_\_\_\_\_ G. M., Pump \_\_\_\_\_ G. M., Meas., Rept. Est. \_\_\_\_\_  
Drawdown \_\_\_\_\_ ft. after \_\_\_\_\_ hours pumping \_\_\_\_\_ G. M.
12. Use: Dom., Stock, PS., RR., Ind., Irr. (Obs) Test hole  
Adequacy, permanence \_\_\_\_\_
13. Quality \_\_\_\_\_ Temp \_\_\_\_\_ °F.  
Taste, odor, color \_\_\_\_\_ Sample Yes \_\_\_\_\_ No \_\_\_\_\_  
Unfit for \_\_\_\_\_
14. Remarks: (Log, Analyses, etc.) Elog 0-357

14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

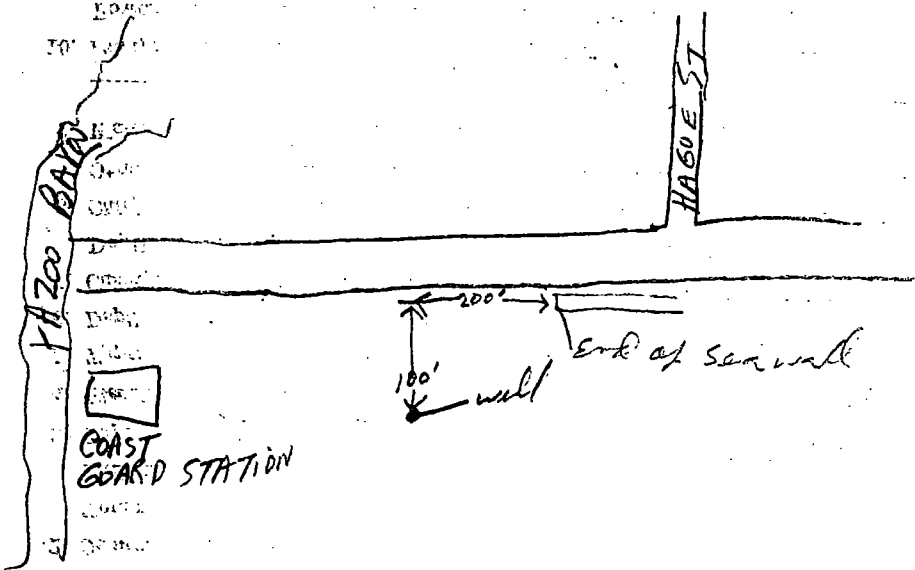

Site destroyed before 8/10/72

Measure 200ft. west of  
End of seawall, 100' south  
of rd.



P205

Log of U.S.G.S.  
TEST Hole NO. 7,  
7-4-60

By Jack Green

0-42	Sand
42-55	Sandy shale
55-60	Shells
60-63	Sand
63-74	Gravel
74-84	Sand
84-105	Sand
105-126	Sand (Coarse) Fine Gravel
126-157	Sand
157-205	Sand
205-225	Sandy shale
225-231	Shale
231-252	Shale + Sandy shale
252-273	Sand with streaks of sand
273-290	Sand
290-294	Sand with shale streaks
294-315	Sand
315-336	Sand with shale streaks
336-340	Sand
340-357	Shale



P 132

WHD Exp. (WH)  
April 1966

Well No.

WELL SCHEDULE  
GEOLOGICAL SURVEY

ELOG # 127

WATER RESOURCES DIVISION

U. S. DEPT. OF THE INTERIOR  
302 040 088 333 901

MASTER CARD

Record by TNS Source of data D Date 7-7-60 No. PASCAGO LA SOUTH 350

State 1 2 0 County (or town) JACKSON 3 3 0

Latitude: 3 0 2 0 4 8 N Longitude: 0 8 8 3 3 3 W Sequential number: 7

Lat-long accuracy: 5 degrees 0 min 6 sec 06 degrees 16 min 50 sec

Local well number: P 1 3 2 0 0 0 0 5 0 6 W Other number: 8 6 H

Local use: 1 0 3 Owner or name: USGS NIO 9 Address: 350' FNL + 2600' FEL

Ownership: County, Fed Gov't, City, Corp or Co, Private, State Agency, Water Dist F

Use of water: Air cond, Bottling, Comm, Dewater, Power, Fire, Dom, Irr, Mad, Ind, P & Rec, Stock, Instic, Unused, Repressure, Recharge, Desal-P & S, Desal-other, Other U

Use of well: Amodc, Drain, Seismic, Heat Exp, Obs, Oil-gas, Recharge, Test, Unused, Withdrew, Waste, Destroyed 0

DATA AVAILABILITY: Well data  Frac. W/L cons.:  Field aquifer char.

Hyd. Lab. data:

Qual. water data: Type: USGS 7-7-60

Freq. sampling:  Pumpage inventory:  no. period:

Aperture cards:

Log data:

WELL-DESCRIPTION CARD

NAME AS ON MASTER CARD Depth well: 3 5 7 ft. 0 Moos. 0

Depth cased: 2 0 4 ft. 2 casing accuracy 2

Finish: porous concrete, gravel w. concrete, gravel w. (screen), boris, gallery, open end, (T) perf., screen, sd. pt., (W) shored, (X) other, (S) other 3

Method: (A) air, (B) bored, (C) cable, (D) dug, (H) hyd, (J) jacked, (P) air, (R) reverse, (T) trenching, (V) driven, (W) drive, (S) wash, (S) other H

Date Drilled: 9 6 0 Pump intake setting: 0 ft. 0

Driller: GREEN

Lift: (A) air, (B) bucket, (C) cent, (J) multiple, (M) multiple, (N) nose, (P) piston, (R) rot, (S) submerg, (T) turb, (U) other J Deep  Shallow

Power: (type): diesel, gas, gasoline, hand, gas, wind, H.E. S Trans. or motor no. 5

Descrip. MP 5 ft above LSD. Alt. MP 7

Alt. LSD: 36.03 ft above MP; 3 6 ft below LSD Accuracy: A

Data Date: 7 6 0 Yield: 0 gpm Method determined 0

Drawdown: 0 ft Accuracy: 0 Pumping period: 0 hrs

QUALITY OF WATER DATA: Iron 0 ppm Surface Chloride 0 ppm Hard. 0 ppm

Sp. Conduct 0 K x 10<sup>6</sup> Temp. 0 °F Date sampled 0


Taste, color, etc. 0

PUNCHED and VERIFIED  
ROLLA COMPUTATION BRANCH

03170006  
4565

NEAR  
Coast  
Guard  
STATION

P 132

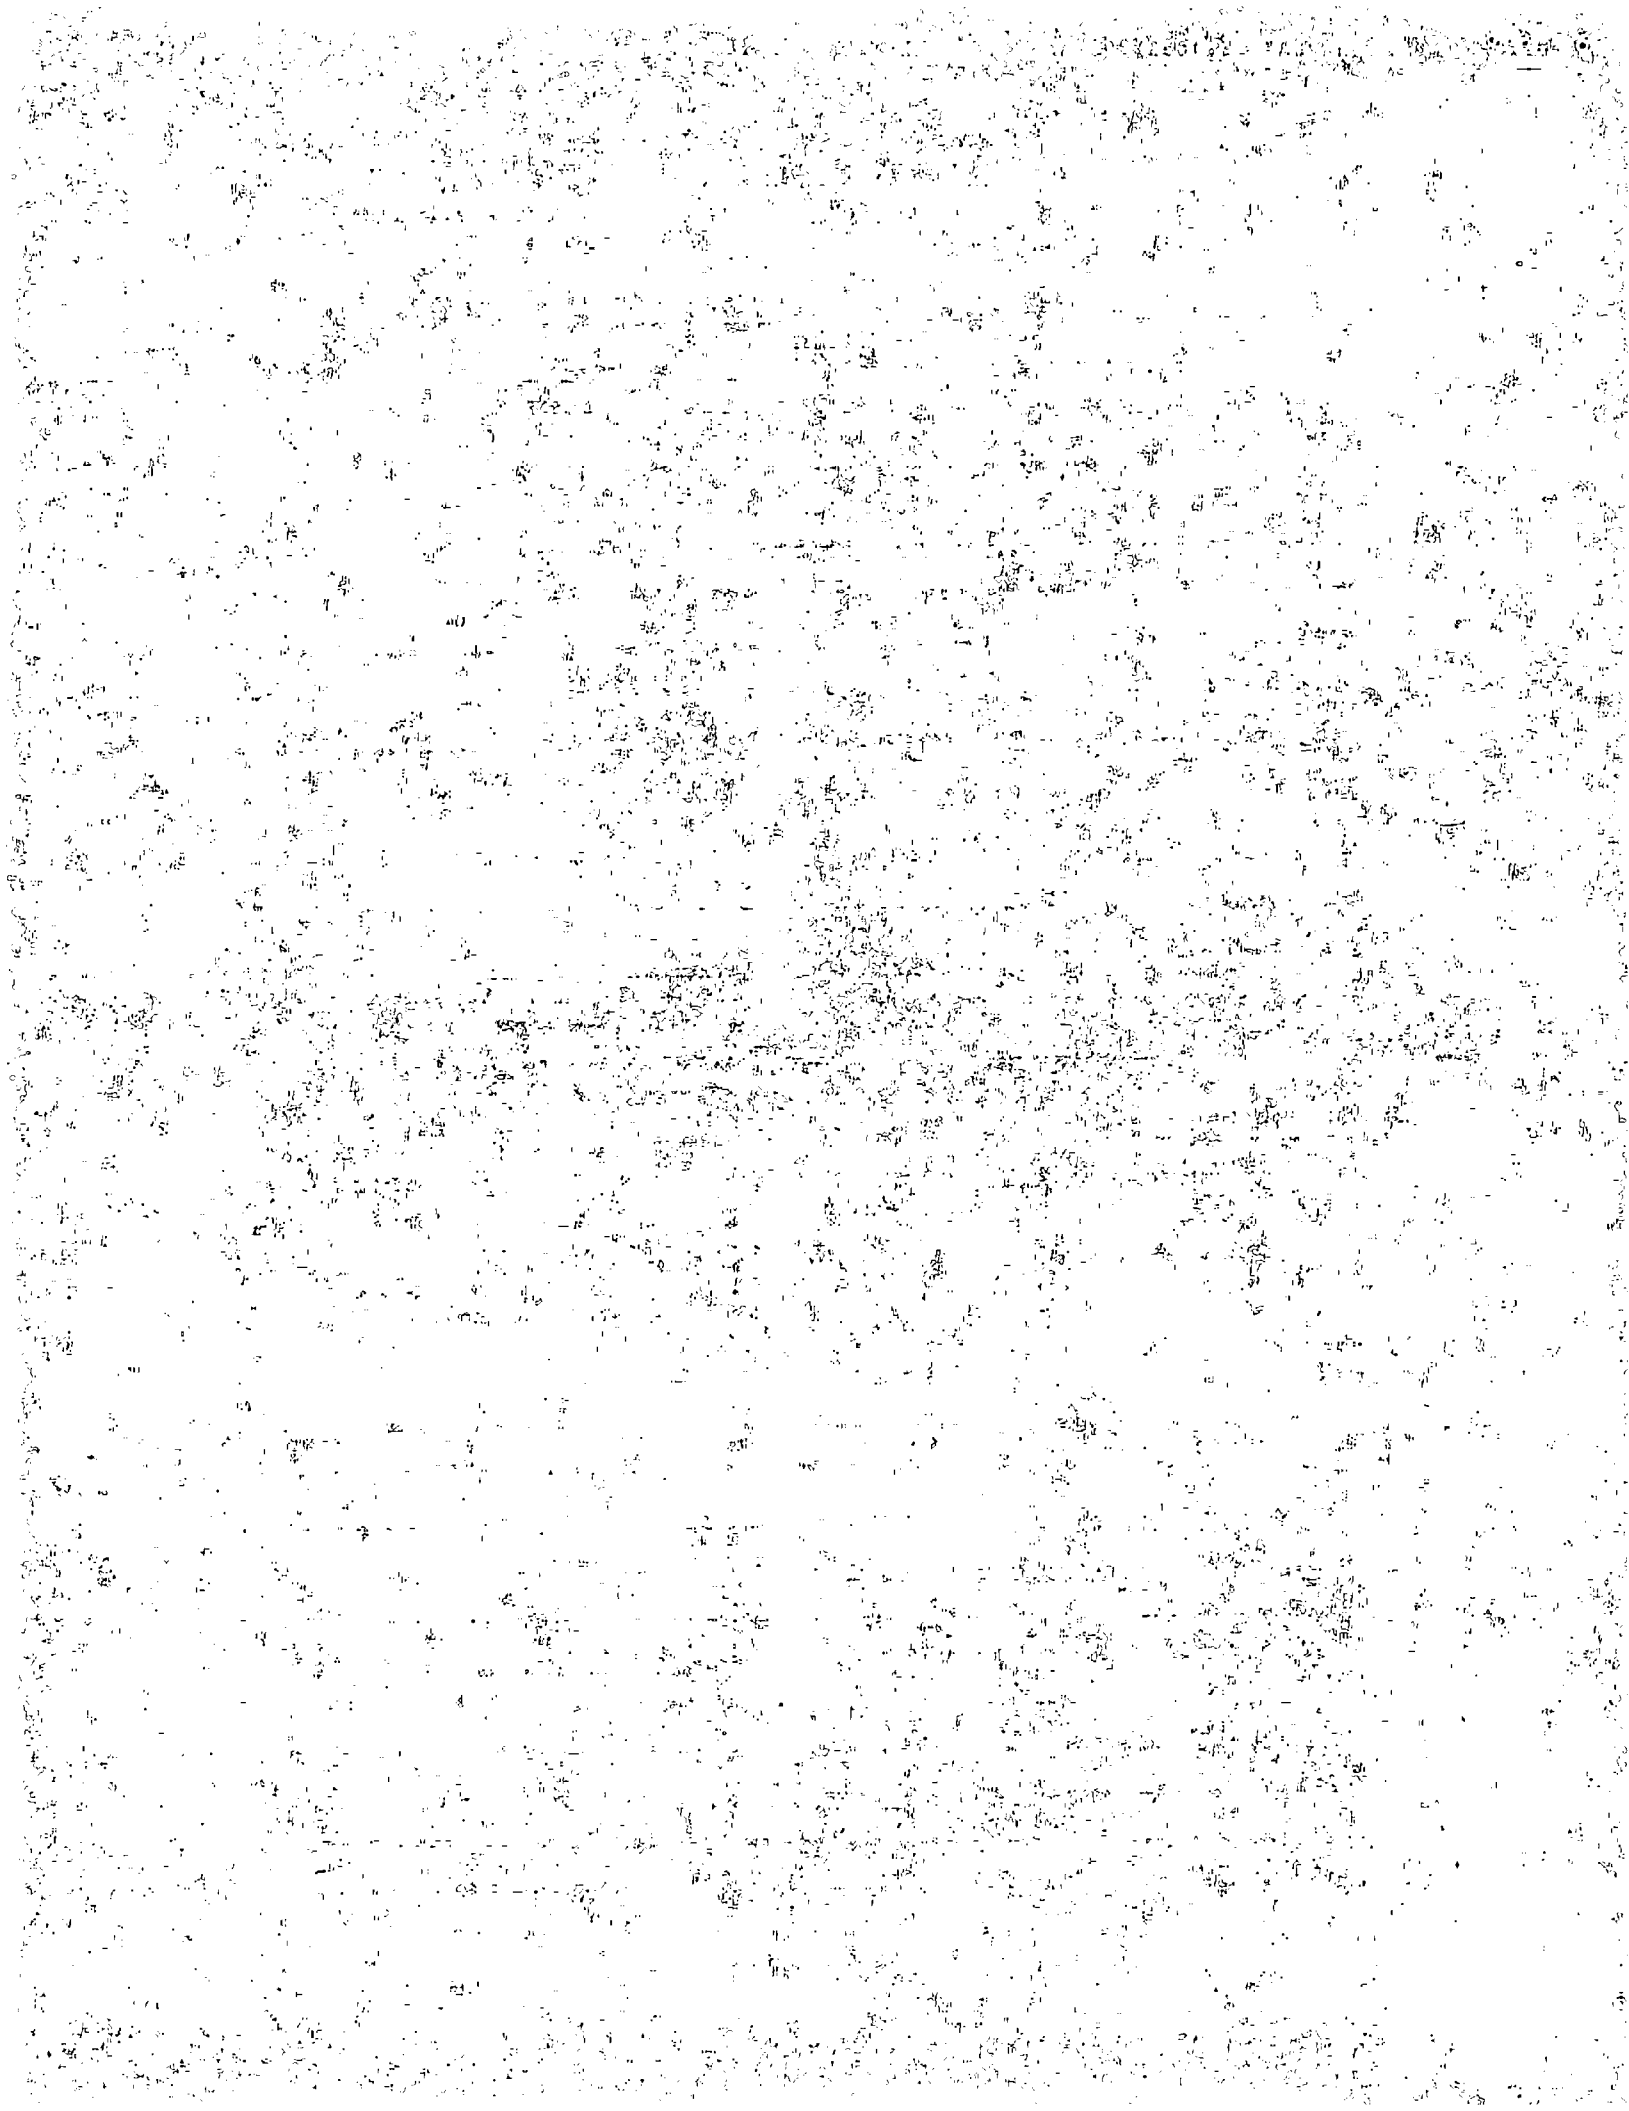



Well No. P132

Latitude-longitude \_\_\_\_\_

HYDROGEOLOGIC CARD

SAME AS ON MASTER CARD  
Physiographic Province: 03 Section: \_\_\_\_\_

Drainage Basin: D 13Q Subbasin: \_\_\_\_\_

Top of well site: (D) depression, stream channel, dunes, flat, hilltop, sink, swamp.  
(E) (F) (G) (H) (I) (J) (K) (L) (M) (N) (O) (P) (Q) (R) (S) (T) (U) (V)  
offshore, padiment, hillside, terrace, undulating, valley flat \_\_\_\_\_

MAJOR AQUIFER: \_\_\_\_\_ system \_\_\_\_\_ series TP \_\_\_\_\_ aquifer, formation, group GF

Lithology: \_\_\_\_\_ Origin: US \_\_\_\_\_ Aquifer Thickness: 3 ft  
Length of well open to: \_\_\_\_\_ ft Depth to top of: 10 ft

MICRO AQUIFER: \_\_\_\_\_ system \_\_\_\_\_ series \_\_\_\_\_ aquifer, formation, group \_\_\_\_\_

Lithology: \_\_\_\_\_ Origin: \_\_\_\_\_ Aquifer Thickness: \_\_\_\_\_ ft  
Length of well open to: \_\_\_\_\_ ft Depth to top of: \_\_\_\_\_ ft


Intervals Reversed: \_\_\_\_\_

Depth to consolidated rock: \_\_\_\_\_ ft Source of data: \_\_\_\_\_

Depth to basement: \_\_\_\_\_ ft Source of data: \_\_\_\_\_

Surficial material: \_\_\_\_\_ Infiltration characteristics: \_\_\_\_\_

Coefficient of storage: \_\_\_\_\_ Coefficient of permeability: \_\_\_\_\_  
Perm: \_\_\_\_\_ spm/ft<sup>2</sup>; Spec cap: \_\_\_\_\_ spm/ft; Number of geologic cards: \_\_\_\_\_



Well No. P132

