

QUITMAN  
E 4  
9-5-62

MISSISSIPPI BOARD OF WATER COMMISSIONERS


WATER WELL DRILLERS LOG

**CODED**

Date: Sept. 5, 19 62, Driller: Layne-Central Company County Quitman

(Name)

(1) Owner of Land	Description & Color of Materials Sand, Clay, Red Clay, Shell, etc.	Thick- ness Feet	Depth Feet
<u>Riverside Oil Mill</u> (Name) <u>Marks, Mississippi</u> (Address)	Clay	15	15
(2) Location: <u>1/4</u> , <u>1/4</u> , Sec. <u>35</u> T <u>28N</u> W <u>1</u> R <u>12E</u> <u>Oil Mill</u> , of <u>Marks</u> (distance) (direction) (Nearest Town)	Sandy brown clay	6	21
(3) Topography: <u>flat</u> (Hilly) (Flat) (Level)	Fine sand	7	28
(4) Purpose of Well: <u>industrial</u> (Domestic Irrigation Municipal, Industrial, Other)	Coarse sand	22	50
Information upon completion of well:	Coarse sand & pea gravel	22	72
(1) Diameter <u>8 1/4</u> inches.	Coarse sand & gravel	56	128
(2) Total Depth <u>880</u> feet.	Coarse sand	15	143
(3) Water Level <u>10</u> feet below top of ground.	Sand	50	193
(4) Cased to <u>184'</u> , Size <u>8"</u>	Shale	148	341
(5) Screen: Size <u>1/8" - 1/4"</u> Length <u>678' - 1"</u>	Sand	17	358
(6) Were any formations sealed against pollution? <u>yes</u> yes, <u>no</u> no.	Shale	7	365
If YES depth of formation. <u>8"</u> casing cemented	Shale strks. rocks	9	374
in. Packer above the screen.	Sandy shale	9	383
Why <u>to eliminate all other</u>	Rock	2	385
formations.	Hard shale	10	395
Drillers Remarks:	Sandy shale	18	413
	Rock	1	414
	Shale	112	526
	Sandy shale	25	551
	Shale	23	574
	Sand	15	589
	Sand strks. shale	31	620
	Shale	33	653
	Shale strks. sand	27	680
	Shale	63	743
	Sand	16	759
	Shale strks. sand	23	782
	Sand	98	880

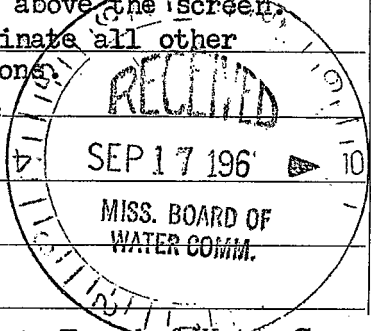

(Use Back Side)

Well No.

