MISSISSIPPI DEPARTMENT OF NATURAL RESOURCES

Bureau of Land and Water Resources

P.O. Box 10631
Jackson, Mississippi 39209

WATER WELL DRILLERS LOG

COUNTY WELL LOCATED: Jackson

WELL NUMBER: J-7232 CODED

DATE WELL COMPLETED: 1-29-87

PERMIT NUMBER: 0239

NAME OF DRILLING FIRM: MCGILL PUMP & WELLS, RT1 BOX 1643 CANAL RD, GULPT, MS 39503

NAME & MAILING ADDRESS OF LANDOWNER: William Flurry, 11617 Old Ft. Bayou Rd, Ocean Springs Ms.

WELL LOCATION: SEC 31 TOWNSHIP 6 N (S) RANGE 8 E (W)

DISTANCE: 10 Miles DIRECTION: North of NEAREST TOWN: O.S.

OTHER LANDMARK:

WELL PURPOSE: (Home) Irrigation, Municipal, Industrial, Fish Pond, etc.

PUMP DATA

PUMP TYPE (Circle One): Submersible, Turbine, (Jet) Flowing Well, Other (Describe)

POWER TYPE (Circle One): (Electric) Tractor, Diesel, Gasoline, Butane, Other (Describe)

Pump Capacity (GPM)	No. of Stages	Setting Depth
10	2	100' FT.

PUMP TEST

Well yielded 12 GPM with a drawdown of 10 ft. after 1 hours of pumping

WELL DATA

Well Depth	Casing Diameter (In.)	Casing Length (Ft.)
460'	2"	450'

Type of Casing	Hole Depth	Depth to Static Water Level
PVC	460'	80'

TYPE OF COMPLETION: (Circle One or More): Gravel Packed, Underreamed, Telescoped, (Natural Development) Open Hole, Other (Describe)

Top of Lap Pipe or Reduction in Casing: FEET

IF TELESCOPED OR MORE THAN ONE SCREEN: USE BACK PAGE

LOG DATA

TYPE OF LOG RUN (Circle One): (No Log Run) Electric, Gamma Ray, Density, Sonic, Neutron, Other (Describe)

Name of Organization Running Log

GEOLOGIC DATA (Office Use Only)

Surface Elev.	Geologic Unit	Unit Thickness	Depth to Top
Subs. SWL	Date	Analysis	Aquifer Test

Driller's Remarks

SCREEN DATA

Diameter - Inches	Length - Feet	Slot Size - Inches
2"	10'	6ths

Screen Type	Depth to Bottom - Feet
PVC	460'

RECEIVED FEB 26 1987 Department of Natural Resources Bureau of Land & Water Resources

DESCRIPTION OF FORMATIONS ENCOUNTERED	FROM	TO
Mud	0	10
Sand	10	150
Mud	150	400
S	~~400~~ ~~420~~	
Sand	400	460

FORMATIONS (Continued)	FROM	TO

IF MORE SPACE IS NEEDED, USE BACK

If well telescopes please sketch and show depths.

GROUND LEVEL

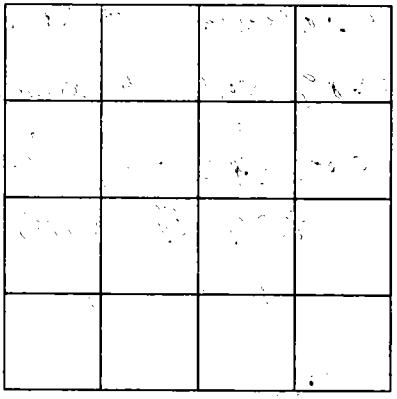

SECTION _____

Please indicate well location X.

ADDITIONAL INFORMATION

If more than one screen, show location of each on sketch.