

WELL SCHEDULE

U. S. DEPT. OF THE INTERIOR GEOLOGICAL SURVEY WATER RESOURCES DIVISION

MASTER CARD W Record by JAC Source of data Engineering report Date 4/26/73 Map Washington

State 28 County (or town) 2 01

Latitude: 31 35 36 N Longitude: 09 11 91 5 Sequential number: 1

Lat-long accuracy: 30 T. 7 S. R. 2 Sec. 30 NW 1/4 Ir. Ir.

Local well number: D024 B3007N02W Other number: Plant #1 Well #2

Local use: 060 66 15 Owner or name: Adams Co. Water Assoc.

Owner or name: ADAMS CO. WATER ASSOC. Address: \_\_\_\_\_

Ownership: County, Fed Gov't, City, Corp or Co, Private, State Agency, Water Dist N

Use of water: (A) Air cond, Bottling, Comm, Dewater, Power, Fire, Dom, Irr, Med, Ind, P S, Rec, (S) Stock, Inacit, Unused, Repressure, Recharge, Desal-P S, Desal-other, Other PK

Use of well: (A) Anode, Drain, Seismic, Heat Res, Obs, Oil-gas, Recharge, Test, Unused, Withdraw, Waste, Destroyed. W

DATA AVAILABLE: Well data  Freq. W/L meas:  Field aquifer char.

Hyd. lab. data: \_\_\_\_\_

Qual. water data; type: USGS

Freq. sampling: \_\_\_\_\_ Pumpage inventory: no, period: \_\_\_\_\_

Aperture cards: \_\_\_\_\_

Log data: \_\_\_\_\_

WELL-DESCRIPTION CARD

SAME AS ON MASTER CARD Depth well: 543 ft Meas. rept 3

Depth cased: 483 ft Casing type: \_\_\_\_\_; Diam. 17 1/2 x 8 in accuracy 17

Finish: porous concrete, gravel w. (perf.), gravel w. (screen), horiz. gallery, open end, (S) screen, (T) sd. pt., (W) shored, (X) open hole, (Z) other 6

Method: (A) air bored, (B) cable, (C) dug, (D) hyd rot., (H) jetted, (J) air percussion, (P) reverse, (R) trenching, (T) driven, (V) drive wash, (W) other 7

Date Drilled: 966 Pump intake setting: \_\_\_\_\_ ft

Driller: Trinidad Water Well Witching Mess

Lift (type): (A) air, (B) bucket, (C) cent, (J) multiple, (L) multiple, (M) none, (N) piston, (P) rot, (R) submerg, (S) turb, (T) other, (Z) Deep, (Z) Shallow 7

Power (type): diesel, elec, gas, gasoline, hand, gas, wind; H.P. 40 Trans. or meter no. 7

Descrip. MP 250 ft above/below LSD, Alt. MP

Alt. LSD: 250 Accuracy: 250 10/7/51 5

Water Level: 155 ft above/below MP; LSD 155 Accuracy: \_\_\_\_\_

Date meas: 066 Yield: 500 gpm Method determined \_\_\_\_\_

Drawdown: \_\_\_\_\_ ft Accuracy: \_\_\_\_\_ Pumping period \_\_\_\_\_ hrs

QUALITY OF WATER DATA: Iron \_\_\_\_\_ Sulfate \_\_\_\_\_ Chloride \_\_\_\_\_ Hard. \_\_\_\_\_

Sp. Conduct 550 x 10<sup>6</sup> 4 Temp. 20.5 °F 205 Date sampled 3-1-74 374

Taste, color, etc. ph 6.8 clear

PUNCHED and VERIFIED  
ROLLA COMPUTATION BRANCH

Well No. D24

Well No. D24

Latitude-longitude

HYDROGEOLOGIC CARD

Physiographic Province: 03 Section: \_\_\_\_\_

Drainage Basin: D Subbasin: 152

Topo of well site: (D) (C) (E) (F) (R) (K) (L) \_\_\_\_\_  
 (H) (P) (S) (T) (U) (V) \_\_\_\_\_

MAJOR AQUIFER: system \_\_\_\_\_ series TM aquifer, formation, group MZ

Lithology: \_\_\_\_\_ Origin: 3 Aquifer Thickness: \_\_\_\_\_ ft

Length of well open to: 137 ft Depth to top of: 448 ft

MINOR AQUIFER: system \_\_\_\_\_ series \_\_\_\_\_ aquifer, formation, group \_\_\_\_\_

Lithology: \_\_\_\_\_ Origin: \_\_\_\_\_ Aquifer Thickness: \_\_\_\_\_ ft

Length of well open to: \_\_\_\_\_ ft Depth to top of: \_\_\_\_\_ ft

Intervals Screened: \_\_\_\_\_

Depth to consolidated rock: \_\_\_\_\_ ft Source of data: \_\_\_\_\_

Depth to basement: \_\_\_\_\_ ft Source of data: \_\_\_\_\_


Surficial material: \_\_\_\_\_ Infiltration characteristics: \_\_\_\_\_

Coefficient Trans: \_\_\_\_\_ gpd/ft Coefficient Storage: \_\_\_\_\_

Coefficient Perm: \_\_\_\_\_ gpd/ft<sup>2</sup>; Spec cap: \_\_\_\_\_ gpm/ft; Number of geologic cards: \_\_\_\_\_

*Pumping level = 212' 3/1/74 on line  
 see D20 sketch*

Section (1) see D24  
024

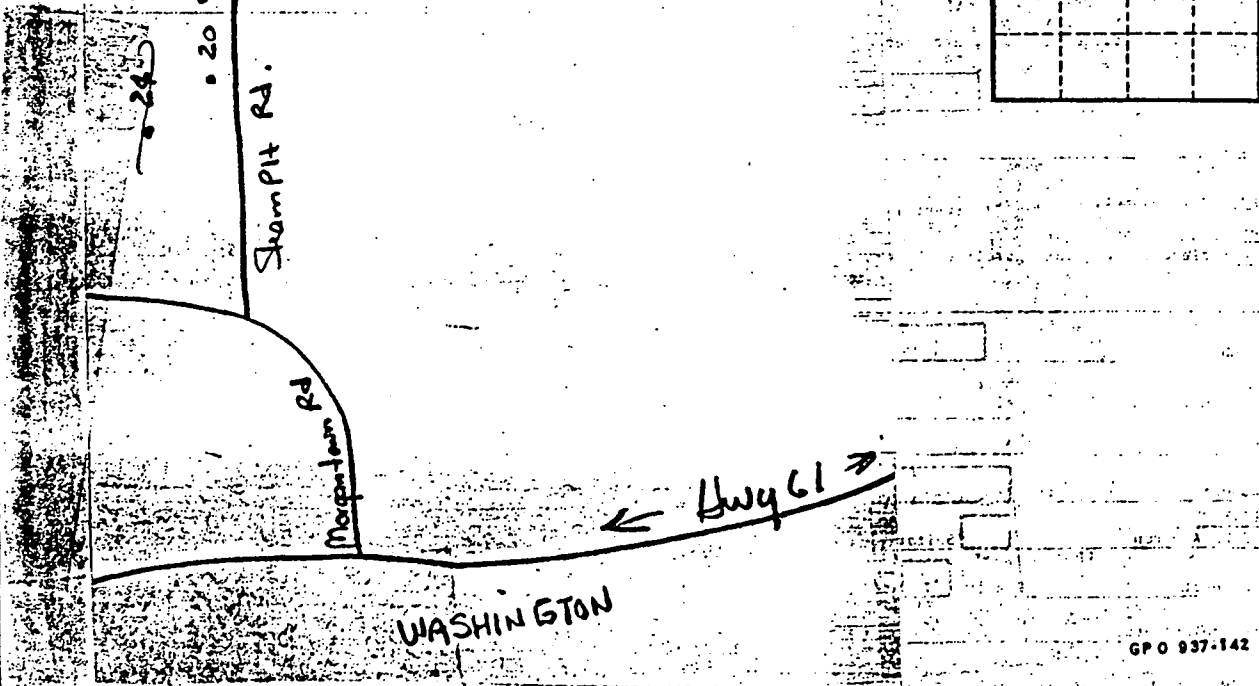

Well No. D24