

WELL SCHEDULE

U. S. DEPT. OF THE INTERIOR

GEOLOGICAL SURVEY

WATER RESOURCES DIVISION

PUNCHED and VERIFIED  
ROLLA COMPUTATION BRANCH

MASTER CARD

Record by BE Wasson Source of data J.A. Henley Date 3/28/57 Map

State 28 County 27 Sequential number 04

Latitude: 33° 07' 37" N Longitude: 089° 27' 44" W

Lat-long accuracy: 2 T. 15 S. R. 8 W. Sec. 27

Local well number: H010 2715NO8E Other number: #3

Local use: \_\_\_\_\_ Owner or name: Attala Lumber Co.

Owner or name: ATTALA LUMBER Address: \_\_\_\_\_

Ownership: County, Fed Gov't, City, Corp or Co, Private, State Agency, Water Dist N

Use of Air cond, Bottling, Comm, Dewater, Power, Fire, Doc, Irr, Med, Ind, P S, Rec, water: \_\_\_\_\_

Stock, Instit, Unused, Repressure, Recharge, Desal-P S, Desal-other, Other U

Use of well: Anode, Drain, Seismic, Heat Res, Obs, Oil-gas, Recharge, Test, Unused, Withdraw, Waste, Destroyed. U

DATA AVAILABLE: Well data  Freq. W/L meas.  Field aquifer char.

Hyd. lab. data: \_\_\_\_\_

Qual. water data; type: \_\_\_\_\_

Freq. sampling: \_\_\_\_\_ Pumpage inventory: \_\_\_\_\_

Aperture cards: \_\_\_\_\_

Log data: \_\_\_\_\_

WELL-DESCRIPTION CARD

SAME AS ON MASTER CARD Depth well: 75 ft Meas. rept accuracy 6

Depth cased; (first perf.) \_\_\_\_\_ Casing type: \_\_\_\_\_ Diam. in 4

Finish: porous concrete, gravel w. (perf.), gravel w. (screen), horiz. gallery, end, open perf., screen, sd. pt., shored, open hole, other 0

Method Drilled: air rot., bored, cable, dug, hyd rot., jetted, air percussion, reverse rotary, trenching, driven, drive wash, other H

Date Drilled: Prot. 1957 Pump intake setting: \_\_\_\_\_ ft

Driller: Hannah name address

Lift (type): air, bucket, cent, jet, multiple, multiple, noise, piston, rot, submerg, turb, other J Deep Shallow

Power (type): diesel, elec, gas, gasoline, hand, gas, wind; H.P. Steam Trans. or meter no. \_\_\_\_\_

Descrip. MP Top of Casing .5 ft above below LSD, Alt. MP \_\_\_\_\_

Alt. LSD: 433 Accuracy: (source) 4

Water Level 31.89 ft below MP; Ft below LSD 37 Accuracy: \_\_\_\_\_

Date meas: 3/28/57 Yield: 357 gpm Method determined

Drawdown: \_\_\_\_\_ ft Accuracy: \_\_\_\_\_ Pumping period \_\_\_\_\_ hrs

QUALITY OF WATER DATA: Iron \_\_\_\_\_ ppm Sulfate \_\_\_\_\_ ppm Chloride \_\_\_\_\_ ppm Hard. \_\_\_\_\_ ppm

Sp. Conduct \_\_\_\_\_ K x 10<sup>6</sup> Temp. \_\_\_\_\_ °F Date sampled \_\_\_\_\_

Taste, color, etc. \_\_\_\_\_

Well No. H10

Well No. H10

Latitude-longitude \_\_\_\_\_ N  
\_\_\_\_\_ S

**HYDROGEOLOGIC CARD**

**SAME AS ON MASTER CARD** 03 **Section:** \_\_\_\_\_

D **Drainage Basin:** 137 **Subbasin:** \_\_\_\_\_

**Topo of well site:** (D) depression, stream channel, dunes, flat, hilltop, sink, swamp, (E) offshore, pediment, hillside, terrace, undulating, valley flat (F) (G) (H) (I) (J) (K) (L) (M) (N) (O) (P) (Q) (R) (S) (T) (U) (V) \_\_\_\_\_

**MAJOR AQUIFER:** \_\_\_\_\_ TE \_\_\_\_\_ TA \_\_\_\_\_

**Lithology:** \_\_\_\_\_ US **Origin:** \_\_\_\_\_ 3 **Aquifer Thickness:** \_\_\_\_\_ ft

**Length of well open to:** \_\_\_\_\_ ft **Depth to top of:** \_\_\_\_\_ ft

**MINOR AQUIFER:** \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_

**Lithology:** \_\_\_\_\_ \_\_\_\_\_ **Origin:** \_\_\_\_\_ \_\_\_\_\_ **Aquifer Thickness:** \_\_\_\_\_ ft

**Length of well open to:** \_\_\_\_\_ ft **Depth to top of:** \_\_\_\_\_ ft

**Intervals Screened:** \_\_\_\_\_


**Depth to consolidated rock:** \_\_\_\_\_ ft **Source of data:** \_\_\_\_\_

**Depth to basement:** \_\_\_\_\_ ft **Source of data:** \_\_\_\_\_

**Surficial material:** \_\_\_\_\_ **Infiltration characteristics:** \_\_\_\_\_

**Coefficient Trans:** \_\_\_\_\_ gpd/ft **Coefficient Storage:** \_\_\_\_\_

**Coefficient Perm:** \_\_\_\_\_ gpd/ft<sup>2</sup>; **Spec cap:** \_\_\_\_\_ gpm/ft; **Number of geologic cards:** \_\_\_\_\_

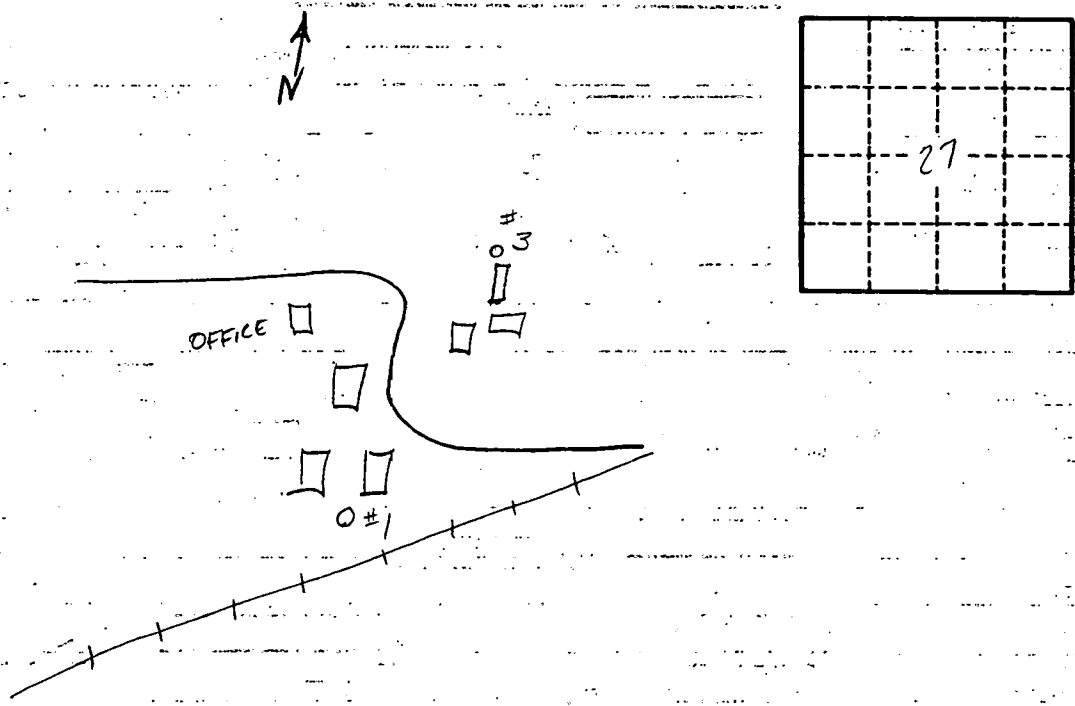

Well No. H10