

9-185  
(October 1950)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
WATER RESOURCES DIVISION

7  
# 28

WELL SCHEDULE

Date 11-5, 19 65 Field No. \_\_\_\_\_  
Record by J. A. Callahan & Fred Thomson Office No. T25  
Source of data Obs etc log (Drilled by EWB - 11-23-65)

1. Location: State Miss County Holmes

Map NE NW 1/4 SW 1/4 sec. 9 T 4 N R 4 E W

2. Owner Australian Springs Com Address Durand Miss

Tenant \_\_\_\_\_ Address \_\_\_\_\_

Driller Barley Drilling Co Address Greenville, Miss

3. Topography \_\_\_\_\_

4. Elevation 345 ± ft. above \_\_\_\_\_  
below \_\_\_\_\_

5. Type: Dug drilled, driven, bored, jetted 11/1965

6. Depth: Rept. 820 ft. Meas. \_\_\_\_\_ ft.

7. Casing: Diam. 6 292 in., to 4 in., Type \_\_\_\_\_

Depth \_\_\_\_\_ ft., Finish 4" x 30" .0010

	X	

8. Chief Aquifer Meridian Ed. From 740 ft. to 816 ft.

9. Water level 80 ft. rept. by driller 11/1965 above bed  
below \_\_\_\_\_  
which is \_\_\_\_\_ ft. above surface

10. Pump: Type Sulf. 6" set at 147' Capacity \_\_\_\_\_ G. M.

Power: Kind \_\_\_\_\_ Horsepower 10

11. Yield: Flow \_\_\_\_\_ G. M., Pump 90 G. M., Meas. Rept. Est. by driller 070\*

Drawdown 15 ft. after \_\_\_\_\_ hours pumping reported G. M.

12. Use: Dom., Stock, PS, RR., Ind., Irr., Obs. \_\_\_\_\_

Adequacy, permanence \_\_\_\_\_


13. Quality Reported O.K. Temp \_\_\_\_\_ °F.

Taste, odor, color \_\_\_\_\_ Sample Yes \_\_\_\_\_ No \_\_\_\_\_

Unfit for \_\_\_\_\_

14. Remarks: (Log, Analyses, etc.) Hole reported to be 1660 ft deep. Elec log to 1584 ft. (124' of 2 1/2" below screen to rock for support) at 943'

Hole cased to 284 ft according  
to log.

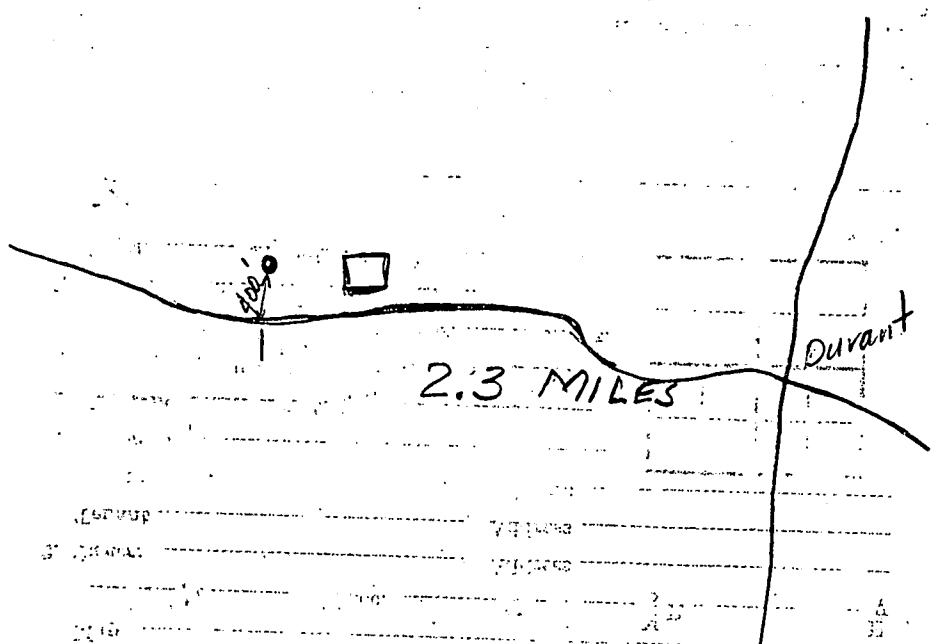

2.3 MILES

Durant

ESTIMATED	VELOCITY	
STANDARD		
DEPTH		

IN RECOGNITION  
OF THE SERVICE  
DEPARTMENT OF THE INTERIOR  
GILDED SERVICE

200501000