

Well plugged.

JAN 11 1974

Water level Data

12.182
12.1288

1987

WL = 12.37

elev. est
245
5-31-89

to be installed

1089
102 = 10.1

plugged

FORM 9-1642 (1-68) Well No. N28 Smithville

WELL SCHEDULE 2 log #48 **PUNCHED**

U. S. DEPT. OF THE INTERIOR GEOLOGICAL SURVEY WATER RESOURCES DIVISION

MASTER CARD **NOV 21 1972**

Record by B.E. Wain Source of data obs. Ed. del. Date 7-13-72 Map Smithville

State Missouri County Stoddard 28 7.9

Latitude: 34 05 44 N Longitude: 088 25 52 Sequential number: 1

Lat-long accuracy: 3 110 8 E Sec 26 NE, NE, SW

Local well number: N028AC261S08E Other number: B & M

Local use: 048 Owner or name: USCG-No 81A

Owner or name: USCG No 81A Address:

Ownership: County (F) Fed Gov't, City, Corp or Co, Private, State Agency, Water Dist (E)

Use of Air Cond. water: (S) Bottling, Comm. Dewater, Power, Fire, Dom, Irr, Med, Ind, P S, Rec, Stock, Instit, Unused, Repressure, Recharge, Desal-E, Desal-other, Other (V)

Use of well: (A) Anode, Drain, Seismic, Heat Res, Obs, Oil-gas, Recharge, Test, Unused, Withdraw, Waste, Destroyed (D)

DATA AVAILABLE: Well data (M) Freq. W/L meas.: (M) Field aquifer char. (M)

Hyd./lab data: (M)

Qual. water data type: (C)

Freq. Sampling: (M) Pumpage inventory: (M) no. period: (M)

Aperture cards: (M) yes (M)

Log data: 2-218 (#48) (M)

WELL-DESCRIPTION CARD

SAME AS ON MASTER CARD Depth well: 180 ft Meas. rept accuracy (M)

Depth casing: 170 ft Casing type: PVC Diam: 4x2 in (M)

Finish: porous concrete, gravel v. concrete, gravel v. (screen), horiz. gallery, end, open perf. (S) (M) (S) (T) (S) (X) (B)

Method: (A) (S) (C) (D) (H) (J) (P) (R) (T) (V) (W) (X) (B) (S)

Drilled: (A) bored, cable, dug, hyd jetted, air rot., percusson, rotary, reverse trenching, driven, drive wash, other (M)

Date Drilled: 7-13-72 972 Pump intake setting: (M) ft (M)

Driller: USCG Perlin

Lift (type): (A) (B) (C) (J) (L) (M) (N) (P) (R) (S) (T) (S) (X) (B) Deep (M) Shallow (M)

Power (type): (A) (S) (C) (D) (H) (J) (P) (R) (T) (V) (W) (X) (B) (S) Trans. or meter no. (M)

Descrip. MP (M) ft above LSD, Alt. MP (M)

Alt. LSD: 246 Accuracy: (source) 10 ft tops (M)

Water Level (M) ft above MP, (M) ft below LSD Accuracy: (M)

Date meas: 7-2 072 Yield: (M) gpm (M) Method determined (M)

Drawdown: (M) ft Accuracy: (M) Pumping period: (M) hrs (M)

QUALITY OF WATER DATA: Iron (M) Sulfate (M) Chloride (M) Hard. (M) Sp. Conduct (M) K x 10 (M) Temp. (M) Date sampled (M) N72

Taste, color, etc. (M)

Latitude-longitude

PHONIC CARD
SAME AS ON MASTER CARD
STEIN'S VON

Physiographic Province: 03 Section: 03
 Drainage Basin: 13-B Subbasin: 03

Topo of well site: (D) depression, stream channel, (E) dunes, flat, hilltop, sink, swamp, (F) offshore, pediment, hillside, terrace, undulating, valley flat, (G) (H) (K) (L) (V)

MAJOR AQUIFER: 03 aquifer, formation, group

Lithology: 03 Origin: 03 Thickness: 03

Length of well open to: 03 Depth to top of: 03

MINOR AQUIFER: 03 aquifer, formation, group

Lithology: 03 Origin: 03 Thickness: 03

Intervals Screened: 03


Depth to consolidated rock: 03 ft Source of data: 03

Depth to basement: 03 ft Source of data: 03

Surficial material: 03 Infiltration characteristics: 03

Coefficient Trans: 03 spd/ft Coefficient Storage: 03

Coefficient Perm: 03 spd/ft; Spec cap: 03 spd/ft; Number of geologic cards: 03

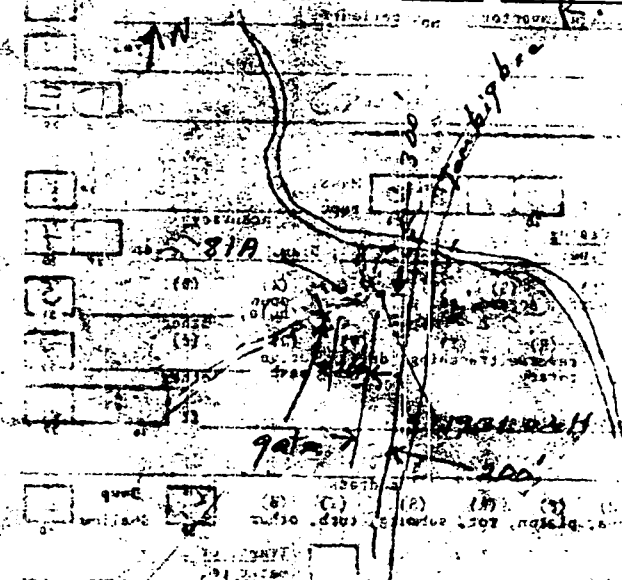

- Drillers log
- 0-10 sand & clay
 - 10-20 fine sand & clay
 - 20-30 fine sand & clay
 - 30-35 fine clay
 - 35-45 hard gravel clay
 - 45-120 gray clay
 - 120-140 sand
 - 140-160 clay
 - 160-190 gravel
 - 190-200 red gravel clay

5-31-89
 Well is 32 ft. NW of grav. rd.
 and 120 ft. NE of gate
 White PVC w/ black well cap.
 Marked 5-31-89 w black + pink flagging

N
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20