

PUNCHED and VERIFIED  
ROLLA COMPUTATION BRANCH

WRD Exp. (GW)  
April 1966

Well No. L 43

### WELL SCHEDULE

U. S. DEPT. OF THE INTERIOR

GEOLOGICAL SURVEY

WATER RESOURCES DIVISION

#### MASTER CARD

Record by J. HARRELL Source of data BOWC Date 4/5/68 Map \_\_\_\_\_

State 28 County (or town) JACKSON 30

Latitude: 30 29 17 N Longitude: 088 32 48 Sequential number: 1

Lat-long accuracy: 4 T. 60 R. 60 Sec. 25 SW SW

Local well number: 1043CC2506S06W Other number: \_\_\_\_\_ B & M

Local use: 00 Owner or name: A E MARINO Address: ESCATAWPA

Ownership: County, Fed Gov't, City, Corp or Co, Private, State Agency, Water Dist P

Use of water: (A) Air cond, (B) Bottling, (C) Comm, (D) Dewater, (E) Power, (F) Fire, (G) Dom, (H) Irr, (I) Med, (J) P S, (K) Rec, (L) Stock, (M) Instit, (N) Unused, (O) Repressure, (P) Recharge, (Q) Desal-P S, (R) Desal-other, (S) Other H

Use of well: (A) Anode, (B) Drain, (C) Seismic, (D) Heat Res, (E) Obs, (F) Oil-gas, (G) Recharge, (H) Test, (I) Unused, (J) Withdraw, (K) Waste, (L) Destroyed W

DATA AVAILABLE: Well data  Freq. W/L meas.:  Field aquifer char.

Hyd. lab. data:

Qual. water data; type:

Freq. sampling:  Pumpage inventory:  yes, no, period:

Aperture cards:  yes

Log data:

#### WELL-DESCRIPTION CARD

SAME AS ON MASTER CARD Depth well: 241 ft Meas. 3

Depth-cased (first perf.): 231 ft Casing type: 231 Diam. 1/4 in

Finish: (A) porous concrete, (B) gravel w. concrete, (C) gravel w. (perf.), (D) gravel w. (screen), (E) horiz. gallery, (F) open end, (G) perf., (H) screen, (I) sd. pt., (J) shored, (K) open hole, (L) other S

Method Drilled: (A) air rot., (B) bored, (C) cable, (D) dug, (E) hyd rot., (F) jetted, (G) air rot., (H) percussion, (I) rotary, (J) reverse, (K) trenching, (L) driven, (M) drive wash, (N) other H

Date Drilled: 5/7/62 962 Pump intake setting: \_\_\_\_\_ ft

Driller: Colville Water Supply Co. address \_\_\_\_\_

Lift (type): (A) air, (B) bucket, (C) cent, (D) jet, (E) multiple, (F) multiple, (G) none, (H) piston, (I) submerg, (J) turb, (K) other J Deep  Shallow

Power (type): (A) diesel, (B) elec, (C) gas, (D) gasoline, (E) hand, (F) gas, (G) wind, (H) H.P. S Trans. or meter no. \_\_\_\_\_

Descrip. MP \_\_\_\_\_ ft above LSD. Alt. MP \_\_\_\_\_

Alt. LSD: 10 Accuracy: (source) 4

Water Level 6 ft above MP; Ft below LSD 6 Accuracy: D

Date meas: 5/7/62 562 Yield: \_\_\_\_\_ gpm Method determined \_\_\_\_\_

Drawdown: \_\_\_\_\_ ft Accuracy: \_\_\_\_\_ Pumping period \_\_\_\_\_ hrs

QUALITY OF WATER DATA: Iron \_\_\_\_\_ ppm Sulfate \_\_\_\_\_ ppm Chloride \_\_\_\_\_ ppm Hard. \_\_\_\_\_ ppm

Sp. Conduct \_\_\_\_\_ K x 10 6 Temp. \_\_\_\_\_ °F Date sampled \_\_\_\_\_

Taste, color, etc. \_\_\_\_\_

Well No. L 43

Well No. 243

Latitude-longitude N  
S  
d m s d m s

HYDROGEOLOGIC CARD

SAME AS ON MASTER CARD  Physiographic Province: 03 Section: \_\_\_\_\_

Drainage Basin: 130 Subbasin: \_\_\_\_\_

Topo of well site: (D) depression, stream channel, dunes, flat, hilltop, sink, swamp, (P) offshore, pediment, hillside, terrace, undulating, valley flat (S) (T) (U) (V) \_\_\_\_\_

MAJOR AQUIFER: TIP system series \_\_\_\_\_ aquifer, formation, group SF

Lithology: US Origin: 3 Aquifer Thickness: \_\_\_\_\_ ft  
Length of well open to: \_\_\_\_\_ ft Depth to top of: \_\_\_\_\_ ft

MINOR AQUIFER: \_\_\_\_\_ system series \_\_\_\_\_ aquifer, formation, group \_\_\_\_\_

Lithology: \_\_\_\_\_ Origin: \_\_\_\_\_ Aquifer Thickness: \_\_\_\_\_ ft  
Length of well open to: \_\_\_\_\_ ft Depth to top of: \_\_\_\_\_ ft

Intervals Screened: 1 1/4

Depth to consolidated rock: \_\_\_\_\_ ft Source of data: \_\_\_\_\_


Depth to basement: \_\_\_\_\_ ft Source of data: \_\_\_\_\_

Surficial material: \_\_\_\_\_ Infiltration characteristics: \_\_\_\_\_

Coefficient Trans: \_\_\_\_\_ gpd/ft Coefficient Storage: \_\_\_\_\_

Coefficient Perm: \_\_\_\_\_ gpd/ft; Spec cap: \_\_\_\_\_ gpm/ft; Number of geologic cards: \_\_\_\_\_

*5 miles north of Escatawpa*

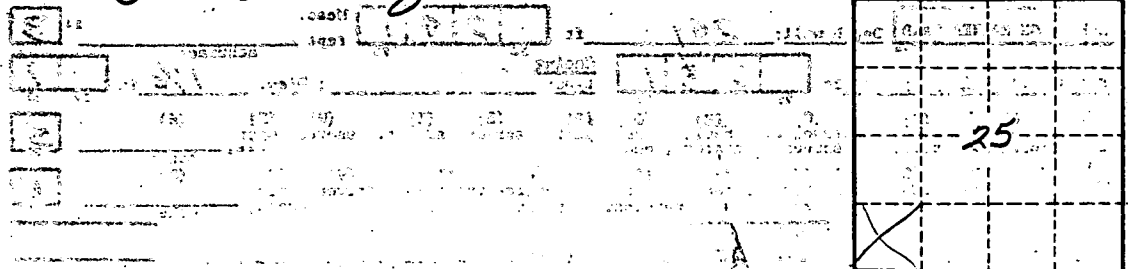

Well No.

243