YAZOO
A 38
3-16-77

MISSISSIPPI BOARD OF WATER COMMISSIONERS
416 North State Street
Jackson, Mississippi 39201

CODED

WATER WELL DRILLERS LOG

3-16 (date well completed) 19 77 Layne Central Co. (firm name) Yazoo (county well located)

LANDOWNER: Eden Fisheries
Yazoo City, MS
(mailing address)

WELL LOCATION:
sec. 10 T ~~12~~ 13 (N) R ~~1~~ 2 (W)
2 (distance) miles West (direction) of Eden (nearest town)

WELL PURPOSE: Irrigation (home, irrigation, municipal, industrial)

WELL COMPLETION DATA:

(1) diameter (inches) 16"
(2) total depth (feet) 108'
(3) static water level (feet) 16 below ~~above~~ top of ground.
(4) casing Steel (material), 72' (depth), 16" (size) if telescope see back.
(5) screen 36' (length), 72' (depth to top) 16" (size), St. Steel (material)
(6) pump 50 (HP) 2,000 (yield gpm) diesel (type power)
(7) electric log No (yes or no)
(organization running log)
(8) how well bottom plugged St.Plate

DRILLERS REMARKS:

description of formations encountered	from	to
Clay	0	13
Clay Sand	13	23
Clay sand	23	33
Clay sand	33	40
Med. sand & Pea Gravel	40	42
Fine Sand	42	43
Fine sand	43	48
Clay	48	49
Med. Fine sand	49	53
Med. Fine Sand	53	63
Med. Fine sand	63	68
Coarse sand & Pea Gravel	68	70
Fine sand	70	72
Coarse sand &Pea Gravel	72	108

CODED

RECEIVED
APR 6 1977
MISS. BD. OF WATER COMM.

If well telescopes please sketch and show depths.

GROUND LEVEL

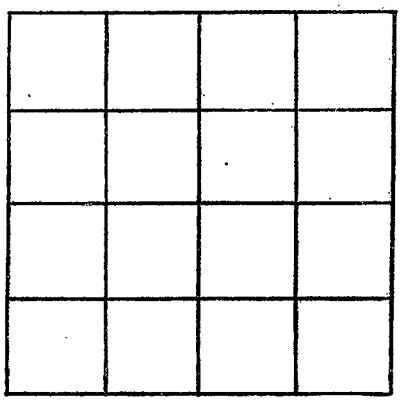

SECTION _____

Please indicate well location X.

ADDITIONAL INFORMATION

If more than one screen, show locations of each on sketch.