

9-185  
(October 1950)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
WATER RESOURCES DIVISION

WELL SCHEDULE

Date 4-15-58, 19      Field No. Q21  
Record by Z. L. [unclear] Office No. Q8  
Source of data MR. PATTERSON

1. Location: State MISS County JACKSON

Map NW 1/4 NW 1/4 sec. 20 T. 17 N. R. 5 E

2. Owner: Standard Products Address MOSS POINT

Tenant \_\_\_\_\_ Address \_\_\_\_\_

Driller: Sutter Address \_\_\_\_\_

3. Topography \_\_\_\_\_

4. Elevation \_\_\_\_\_ ft. above  
\_\_\_\_\_ ft. below

5. Type: Dug, drilled, driven, bored, jetted 3-27-58

6. Depth: Rept. 1000' 8" ft. Meas. \_\_\_\_\_ ft.

7. Casing: Diam. 2 in., to \_\_\_\_\_ in., Type DI  
Depth \_\_\_\_\_ ft., Finish 20# 1/2 gal. G.M.

8. Chief Aquifer Pascagoula From 909 ft. to 929 ft.

Others \_\_\_\_\_

9. Water level 30 lbs +4 ft. rept 1958 above  
+33 ft. in 1957 which is \_\_\_\_\_ ft. above  
\_\_\_\_\_ ft. below surface

10. Pump: Type Jet Capacity \_\_\_\_\_ G. M.  
Power: Kind Electric Horsepower \_\_\_\_\_

11. Yield: Flow 37 G. M., Pump \_\_\_\_\_ G. M., Meas., Rept. Est.  
Drawdown \_\_\_\_\_ ft. after \_\_\_\_\_ hours pumping \_\_\_\_\_ G. M.


12. Use: Dom., Stock, PS., RR., Ind., Irr., Obs. MOSTLY DRINKING  
Adequacy, permanence \_\_\_\_\_

13. Quality \_\_\_\_\_ Temp 78 °F.


Taste, odor, color HAS A DISAGREEABLE Sample Yes  
Unfit for MINERAL - salt (?) Q. 387 ppm. No

14. Remarks: (Log, Analyses, etc.) gait flowing SOMETIMES

Log on back over

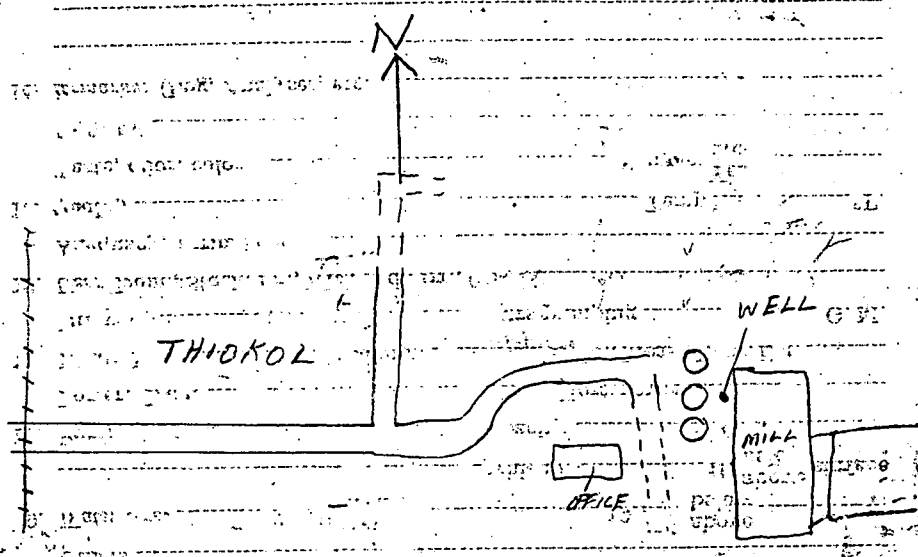

- 0-18 Mattled Clay
- 18-78 Sand & Gravel
- 78-136 Shale
- 136-212 Sand + Gravel
- 212-315 Shale
- 315-342 Sand
- 342-905 Shale
- 905-929 SAND
- 929-1000 very fine sand and mud
- strainer set 909-929'



Colville drilled a well to 954 ft  
 at Standard Products which he had to  
 abandon

MEYER SCHNEIDER

MINERAL PRODUCTS DIVISION  
 GEOLOGICAL SURVEY  
 DEPARTMENT OF THE INTERIOR  
 WILLED STATES

(Circular 1320)  
 1-122